




B360 PRO FULLY RUGGED NOTEBOOK

- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 12세대 Intel® Core™ Processor
- 13.3" FHD LumiBond® display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- NVIDIA® GeForce® GTX1650 4GB discrete graphics controller (옵션)
- Enhanced enterprise security with dual user replaceable storage(옵션), Windows Hello face-authentication camera, integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport™ battery swappable technology

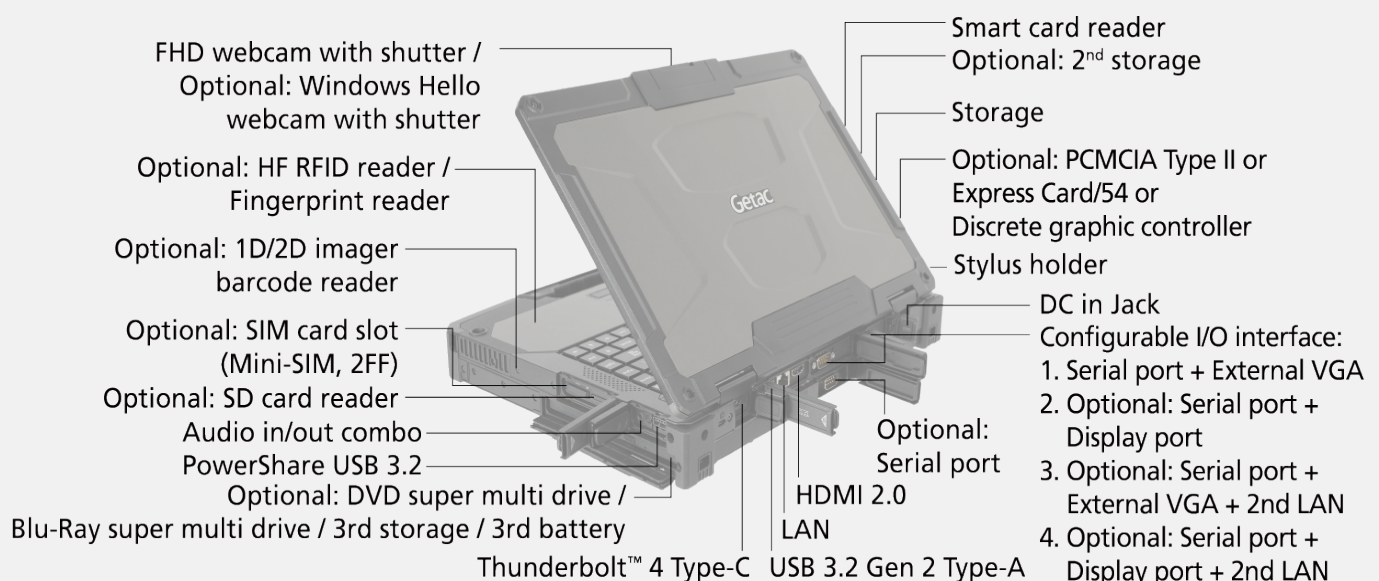

SPECIFICATIONS

운영체제
Windows 11 Pro

CPU
Intel® Core™ i5-1240P Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:
Intel® Core™ i5-1250P vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1260P Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ i7-1270P vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ i7-1280P vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

그래픽 컨트롤러
Intel® Iris® X Graphicsⁱ
옵션: NVIDIA® GeForce® GTX1650 4GB discrete graphics controller^{ii,iii}

디스플레이
13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,400 nits LumiBond® display with Getac sunlight readable technology
Capacitive multi-touch screen

스토리지 & 메모리
8GB DDR4
옵션: 16GB / 32GB / 64GB DDR4
256GB PCIe NVMe SSD
옵션: 512GB / 1TB / 2TB PCIe NVMe SSD
옵션 2nd storage^{iv}: 256GB / 512GB / 1TB / 2TB PCIe NVMe SSD
옵션 multimedia bay storage : 1TB / 2TB SATA SSD

키보드
LED backlit membrane keyboard

포인팅 장치
Touchscreen
- Capacitive multi-touch screen
Touchpad
- Touchpad with two buttons

확장 슬롯
Smart card reader x 1
옵션: SD card reader x 1
옵션: Discrete graphics controller, or PCMCIA Type II, or ExpressCard/54ⁱⁱⁱ
옵션: 1D/2D imager barcode reader

Multimedia Bay
Configurable options^{v,vi} :
1. 옵션: DVD super multi drive, or Blu-Ray super multi drive, or 3rd storage
2. 옵션: 3rd battery

I/O 인터페이스
5M webcam x 1^{xxii}
Audio in/out combo x 1
DC in Jack x 1
PowerShare USB 3.2 x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1^{vii}
LAN (RJ45) x 1
HDMI 2.0 x 1
Docking connector x 1
옵션: SIM card slot x 1 (Mini-SIM, 2FF)^{viii}
옵션: Windows Hello face-authentication FHD camera (front-facing) x 1^{ix}
옵션: RF antenna pass-through for GPS, WWAN and WLAN
Configurable I/O options^{ix} :
1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1 + Display port x 1
3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2nd LAN (RJ45) x 1
5. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1
6. Serial port (9-pin; D-sub) x 2 + Display port x 1
7. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
8. Serial port (9-pin; D-sub) x 2 + Display port x 1 + 2nd LAN (RJ45) x 1

통신 인터페이스
10 / 100 / 1000 base-T Ethernet
Intel® Wi-Fi 6E AX211, 802.11ax
Bluetooth (v5.3)^x
옵션: Dedicated GPS with L1/L5^{xxiii}
옵션: 4G LTE mobile broadband with integrated GPS^{viii,xxiv}
옵션: 5G Sub-6 with integrated L1/L5 GPS^{xxiii,xxiv}

보안 기능
TPM 2.0
Kensington lock
Smart card reader
옵션: Fingerprint reader^{xi}
옵션: HF RFID reader^{xi, xii}
옵션: Windows Hello face-authentication FHD camera (front-facing)^{xxiii}

전원
AC adapter (90W, 100-240VAC, 50/60Hz)
AC adapter (120W, 100-240VAC, 50/60Hz)ⁱⁱ
High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh) x 2
옵션: Multimedia bay battery (11.1V, typical 4200mAh; min. 2080mAh) x 1
LifeSupport™ battery swappable technology

치수 & 무게
342 x 281 x 53.5mm (13.46" x 11.06" x 2.11")
3.08Kg (6.79lbs)^{xiii}

견고성
MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^{xiv}
Vibration & 6ft (1.8m) drop resistant
옵션: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)^{xv}
옵션: Salt fog certified

사용가능 환경
Temperature^{xvi} :
- Operating: -29°C to 63°C / -20°F to 145°F^{xvii}
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

소프트웨어
Getac Utility
Getac Geolocation
Getac Barcode Manager^{xxviii}
옵션: Absolute Persistence®
옵션 소프트웨어
Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility^{xxix}

B360 PRO FULLY RUGGED NOTEBOOK

악세서리
High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh)
AC adapter (90W, 100-240VAC)
Capacitive stylus with tether

옵션:
Carry bag
High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
AC adapter (120W, 100-240VAC)ⁱⁱ
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle cradle^{xx}
Vehicle dock^{xx}
Office dock
Spare SSD kit
100W Type-C adapter^{xxi}

- I. Units equipped with dual channel memory come with Intel® Iris® X Graphics.
- II. 120W AC adapter is used for office dock and for device configured with discrete graphics card.
- III. Discrete graphics card, PCMCIA slot, and Expresscard slot are mutually exclusive.
- IV. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- V. Option 1 and 2 are mutually exclusive.
- VI. Factory option. Not user swappable.
- VII. The configuration with a discrete graphic controller does not support USB-C power delivery function.
- VIII. Units with 4G LTE option come with an embedded SIM card slot.
- IX. External VGA and Display port are mutually exclusive.
- X. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- XI. Fingerprint reader and HF RFID reader are mutually exclusive.
- XII. HF(13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- XIII. Weight and dimensions vary from configurations and optional accessories.
- XIV. MIL-STD-461 90W AC adapter sold separately.
- XV. Available with limited configurations and environment conditions.
- XVI. Tested by an independent third-party test lab following MIL-STD-810H.
- XVII. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XVIII. Available when barcode reader option is selected.
- XIX. Models require either embedded or standalone GPS module.
- XX. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XXI. Do not support the configurations with discrete graphics card.
- XXII. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- XXIII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- XXIV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (GPS, WWAN, WLAN)	-



(주)씨에스글로비스
경기도 과천시 과천대로7길 65, 과천상상자이타워 B동 1220호
제품 문의 : 02)782-4700 / 기술 문의 : 02)782-7500
www.getac.co.kr / getac_sales@getac.co.kr