




ZX70 FULLY RUGGED TABLET

- Qualcomm® Snapdragon™ 660, Octa-core 프로세서
- Verified as Android enterprise recommended ⁱ
- 7" LumiBond® display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP67 certified
- Optional barcode reader, RFID reader



ZX70 3D demo

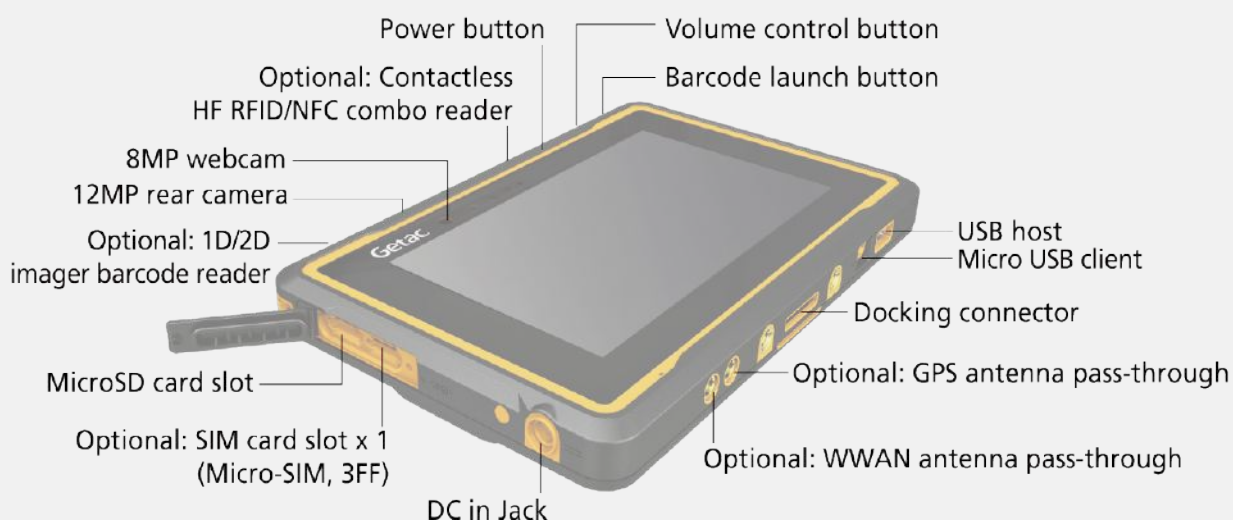

SPECIFICATIONS

운영체제
Android™ 10.0

CPU
Qualcomm® Snapdragon™ 660, Octa-core
1.95GHz
Max. 2.2GHz

그래픽 컨트롤러
Qualcomm® Adreno™ 512 GPU

디스플레이
7" Wide Viewing Angle TFT LCD HD (1280 x 720)
Protection film
LumiBond® display with Getac sunlight readable technology
Capacitive multi-touch screen

스토리지 & 메모리
4GB LPDDR4
64GB eMMC

키보드
Power button
3 tablet programmable buttons

포인팅 장치
Touchscreen
- Capacitive multi-touch screen

화장 슬롯
옵션: 1D/2D imager barcode reader

I/O 인터페이스
8M pixels webcam x 1
12M pixels autofocus rear camera x 1
DC in Jack x 1
USB 2.0 (Host) x 1
MicroUSB 2.0 (Client) x 1
MicroSD x 1
Docking connector (Pogo/JAE) x 1
옵션: SIM card slot x 1 (Micro-SIM, 3FF) ⁱⁱⁱ
옵션: RF antenna pass-through for GPS and WWAN

통신 인터페이스
Wi-Fi 802.11ac
Bluetooth (v5.0) ⁱⁱ
Dedicated GPS
옵션: 4G LTE mobile broadband ⁱⁱⁱ

보안 기능
옵션: HF RFID/NFC combo reader ^{iv, v}

전원
AC adapter (25W, 100-240VAC, 50/60Hz)
Li-ion battery (3.8V, typical 8480mAh; min. 8220mAh)

치수 & 무게
218 x 142 x 27mm (8.58" x 5.6" x 1.08")
762g (1.68lbs) ^{vi}

견고성
MIL-STD-810H certified
IP67 certified
Vibration & 6ft (1.8m) drop resistant ^{vii}
옵션: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)

사용가능 환경
Temperature ^{viii};
- Operating: -21°C to 60°C / -6°F to 140°F
- Storage: -40°C to 71°C / -40°F to 160°F

Humidity:
- 95% RH, non-condensing

소프트웨어
Getac File Browser
Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac deployXpress (trial version)
Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, YouTube music, Play movies, Duo and photos)

옵션 소프트웨어
Getac Driving Safety Utility
Getac deployXpress
Getac OEMConfig

악세서리
AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz)
Capacitive stylus with tether
Pen holder
Wrist strap

옵션:
Carry bag
AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz)
Office dock AC adapter (60W, 110-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Shoulder strap (2-point)
Wrist strap
Rotating hand strap with kickstand and stylus holder
Vehicle cradle ^{ix}
USB to RS232 converter cable
Docking connector to HDMI converter cable
Vehicle dock ^{ix}
Office dock
Pen holder

ZX70 FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Units with 4G LTE option comes with an embedded SIM card slot.
- IV. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- V. HF RFID/NFC combo reader applies to US & EU.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Tested by an independent third-party test lab following MIL-STD-810H.
- IX. Havis vehicle dock is e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Getac-made Vehicle Dock (JAE)	Havis Vehicle Dock (Pogo,power only)	Havis Vehicle Dock (JAE)	Gamber-Johnson Charging Cradle (Pogo)	Havis Vehicle Dock (Pogo)	Office Dock (JAE)	Office Dock (Pogo)
Serial Port	1	-	1	-	1	-	-
Speaker	1	-	-	-	-	-	-
Audio Output	1	1	1	-	1	1	1
DC in Jack	1	1	1	1	1	1	1
USB	USB Host x 2	-	USB2.0 x 2	-	USB2.0 x 2	USB Host x 2 MicroUSB Client x 1	USB Host x 2
LAN	1	-	1	-	1	1	1
HDMI	1	-	1	-	-	1	-
RF Antenna Connector	(WWAN, GPS)	(WWAN, GPS)	(WWAN, GPS)	-	(WWAN, GPS)	-	-



(주)씨에스글로비즈
경기도 과천시 과천대로7길 65, 과천상상자이타워 B동 1220호
제품 문의 : 02)782-4700 / 기술 문의 : 02)782-7500
www.getac.co.kr / getac_sales@getac.co.kr